



ALL-IN-ONE CONTROLLER



Catalogue

Contents

1 Overview.....	1
2 Features.....	2
3 Appearance	3
Front panel	3
Rear Panel.....	4
4 Specification Parameters	6
5 Attachment.....	7



1 Overview


- The TW4S is a professional LED display controller. Besides the function of display control, it also features in powerful front-end processing, so an external scalar is no longer needed. With professional interfaces integrated, TW4S with excellent image quality and flexible image control greatly meet the needs of the broadcast industry. It's friendly in user-interface, so that the display to work has never been as easier and more enjoyable as with TW4S.

2 Features

1. The inputs of the TW4S include CVBS×2, VGA×2, DVI×1, HDMI×1, DP×1 and SDI×1. Support Input ports up to 1920*1080 for HDMI, DVI, VGA, SDI, CVBS and 4K inputs for DP.
2. Provide seamless high-speed switch and fade-in/ fade-out effect so as to strengthen and display picture demonstration of professional quality.
3. Seamless fast source transfer with a transition effect can be selected arbitrarily, suitable for show performances, major events.
4. The location and size of PIP can both be adjusted, which can be controlled at will.
5. Nova G4 engine technology makes the screen using nova control system smoother and more beautiful, with depth of color, images, led screen will become more realistic.
6. It is possible to customize deep calibration of color, contrast, color level on the LED screen in the available menu of TWT TW4S to create the most realistic color.
7. HDMI/external audio input.
8. 10bit/8bit HD video source.
9. The loading capacity: 2.3 million pixels (customized maximum width height 3840, maximum height 1920).
10. Support multiple controller montage for loading huge screen.
11. Supports pairing multiple TW4S processors together so that larger screens can be made through DVI LOOP.
12. It is possible to configure yourself through the keys above the image processor without going through TWT's configuration software, all you need to do is just use your hands.
13. Adopt an innovative architecture to implement smart configuration; the screen debugging can be completed within 30 seconds; greatly shorten the preparation time on the stage.
14. An intuitive LCD display interface and clear button light hint simplify the control of the system.

3 Appearance

Front panel

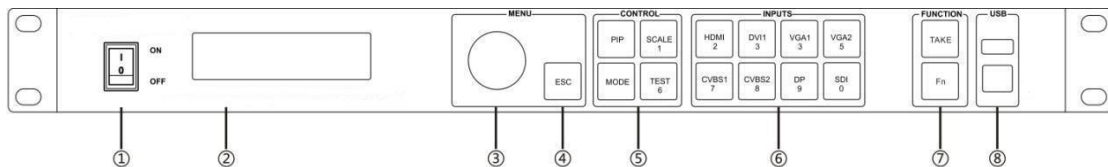

<p>①: Power switch.</p>	
<p>②: Operation screen.</p>	
<p>③: Knob. to press knob means, Enter or OK, rotating knob represents selection or adjustment</p>	
<p>④: ESC. Escape current operation or selection.</p>	
<p>⑤: Four control keyboard shortcuts. PIP: PIP Turn-on/Turn off. The lighting of this key represents the turn-on of PIP; otherwise, PIP is turned off. SCALE: Zoom on/off (allows led displays in whole or in pixels). MODE: Quick shortcuts select modes for preinstalled processors. TEST: Quick shortcuts allow to check screen color, brightness, contrast.</p>	<p>Note: You can enter numbers, such as layer size and offset value, by pressing the number buttons. The number button will be highlighted after pressed.</p>
<p>⑥: Shortcut keys for switching of 8 signal input sources. Short press to set as the main screen input source, and long press to set as PIP input source. the key is bright after press when the video source has signal; the key flashes when the input of video source has no signal. The setting result can be checked while setting on the display screen and LCD screen.</p>	

⑦: **Function keys**


TAKE: Display switching shortcut key. After short pressing TAKE key, PIP will be opened; if it has been opened, the switching of between MAIN and PIP will be realized.

Fn: Custom shortcut key.

⑧: **Flat mouth** (Type A, female USB) is USB interface, which connects U disk;

Square mouth (Type B female USB) is USB controlling interface, communication with PC.

Rear Panel



Tips: In order to improve the user's experience, the layout of interface may be adjusted a little, the picture is only for reference.

Input Source	
Audio	Audio Input
DP	DP Input
HDMI	HDMI Input
SDI IN	SDI Input
DVI	DVI Input
VGA1~VGA2	2 - Channel VGA Inputs
CVBS1~CVBS2	2 - Channel PAL/NTSC TV composite video Input
Output Interface	
DVI LOOP	DVI LOOP Output
SDI LOOP	SDI LOOP Output
Monitor - DVI1 OUT	DVI1 Monitoring output connector
Monitor - DVI2 OUT	DVI2 Monitoring output connector
LED Out 1、 2、 3、 4	4 Gigabit Ethernet outputs. Only Ethernet port 1 supports audio output. When the multifunction card is connected for audio decoding, the multifunction card must be connected to the Ethernet port 1.
Controlling Interface	
ETHERNET	Network Control (Communication with PC, or Access Network)
Type B, female USB	USB Control (Communication with PC, or Cascade IN)
Type A, female USB	USB Cascade OUT
Power	
AC 100-240V ~ 50/60HZ	AC Power Interface

Tips: The two USB (type A) on front panel and rear panel are both for bidden to connect with PC directly.

4 Specification Parameters

Input Index		
Port	Number	Resolution Specification
CVBS	2	PAL/NTSC
VGA	2	VESA Standard, support max. 1920×1200@60Hz input
DVI	1	VESA Standard (support 1080i input), support HDCP
SDI	1	480i, 576i, 720P, 1080i/P
HDMI	1	EIA/CEA-861 standard, in accordance with HDMI-1.3 standard, support HDCP
DP	1	VESA Standard

Output Index		
Port	Number	Resolution Specification
DVI LOOP	1	Consistent with DVI input
VGA	1	Monitoring output connector
DVI	1	Up to 1920×1200@60Hz output resolution
SDI LOOP	1	Consistent with SDI input
LED OUT	4	4 Gigabit Ethernet outputs. Only Ethernet port 1 supports audio output. When the multifunction card is connected for audio decoding, the multifunction card must be connected to the Ethernet port 1

Specification of complete machine	
Input Power	AC100 ~ 240VAC, 50/60Hz
Overall Power Consumption	25W
Operating Temperature	-20~60°C
Size	482.6 × 251.5 × 45 (mm)
Weight	2.55 Kg

5 Attachment

The Conflict List of PIP Signal Source.

		Input Source of Main Channel							
		HDMI	DVI	VGA1	VGA2	CVBS1	CVBS2	SDI	DP
PIP Input Source	HDMI	Gray	×	√	√	√	√	√	√
	DVI	×	Gray	√	√	√	√	√	√
	VGA1	√	√	Gray	×	√	√	√	√
	VGA2	√	√	×	Gray	√	√	√	√
	CVBS1	√	√	√	√	Gray	×	√	√
	CVBS2	√	√	√	√	×	Gray	√	√
	SDI	√	√	√	√	√	√	Gray	√
	DP	√	√	√	√	√	√	√	Gray

- √ denotes the input sources can be used by both the main screen and PIP at the same time.
- × denotes the input sources cannot be used by both the main screen and PIP at the same time.
- Gray denotes the main screen and PIP use the same input source.



TWT APPLIED TECHNOLOGY AND SERVICES PTE LTD

TWT reserves the right to make product appearance , dimensions and specifications alternations.

TWT APPLIED TECHNOLOGY AND SERVICES PTE LTD reserves the ultimate right to the interpretation of this catalogue.

ADDRESS : 68 SUNGEI KADUT LOOP # 06 - 01 NUTZ CENTER , SINGAPORE 729504

TEL : +65 6367 3272 FAX : +65 6367 0763