




# CABINET DISPLAY

## TCI-P2-640-640

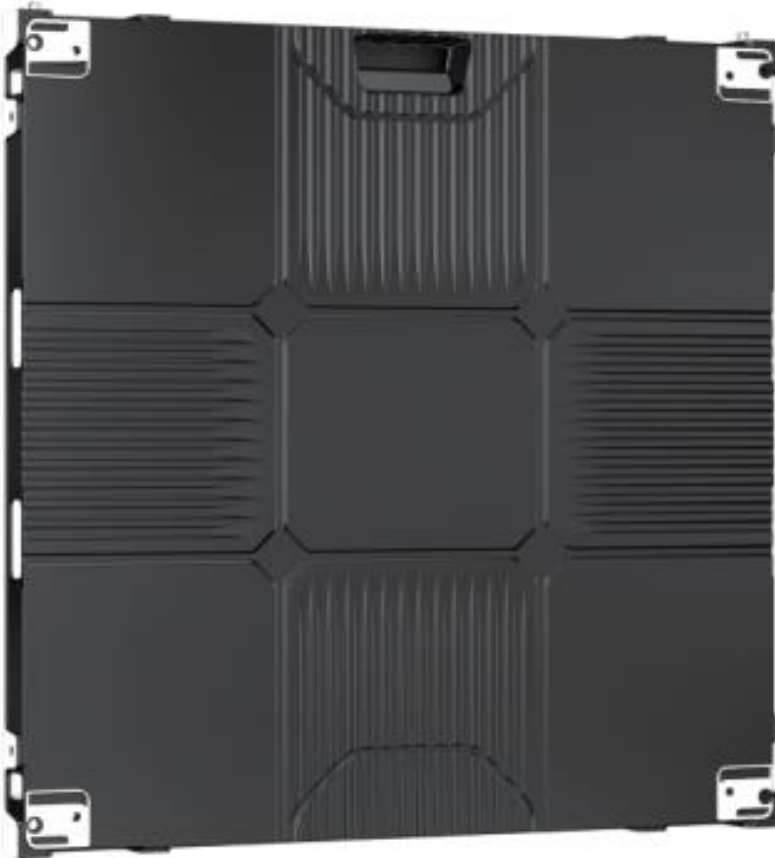

- **High-Resolution Display:** The TCI-P2-640-640 offers a high resolution of 320x320 pixels, ensuring sharp and detailed visuals. This makes it ideal for displaying intricate content with clarity and precision in indoor settings.
- **Advanced LED Technology:** The display is equipped with SMD1515 LEDs, known for their compact size and high efficiency. These LEDs deliver vibrant and consistent colors, providing excellent visual performance even in well-lit indoor environments.
- **Pixel Pitch:** With a 2mm pixel pitch, the TCI-P2-640-640 provides a high pixel density, resulting in smooth and sharp images. This small pixel pitch is perfect for close-range viewing, ensuring that content looks great from any distance.
- **Ideal for Indoor Use:** Specifically designed for indoor environments, this LED cabinet display is ideal for applications such as retail displays, corporate presentations, exhibitions, and control rooms, where high-definition visuals are essential.
- **Energy Efficiency:** The use of SMD1515 LEDs not only enhances image quality but also ensures that the display is energy-efficient, helping to reduce operational costs while maintaining high performance.
- **Versatile Applications:** The TCI-P2-640-640 is highly versatile and can be utilized in various indoor applications, including digital signage, advertising, information displays, and more, making it a flexible choice for different content needs.

<b>Model</b>	TCI-P2-640-640
<b>Pixel Pitch (mm)</b>	2.0mm
<b>Led Configuration</b>	SMD1515
<b>Module Size</b>	320 x 160
<b>Module Quantity</b>	8 Module (2x4)
<b>Card Quantity</b>	2 Card
<b>Cabinet Resolution (Pixel)</b>	320 x 320
<b>Cabinet Dimension (mm)</b>	640 x 640 x 59
<b>Cabinet Weight</b>	8,9Kg
<b>Cabinet Material</b>	Aluminum Alloy
<b>Brightness</b>	1200 Nits
<b>Viewing Angle</b>	150/150
<b>Bit Depth</b>	14 - 16bits
<b>Color Temperature</b>	2.800K ~ 10.000K
<b>Video Frequency</b>	50/60Hz
<b>Refresh Rate</b>	3840 Hz
<b>Power Source</b>	220VAC – 50/60Hz
<b>Max Power</b>	270W
<b>Operating Humidity Level</b>	10% ~ 80%
<b>Operating Temperature</b>	-20°C ~ 40°C
<b>IP Protection</b>	IP31
<b>Maintenance Support</b>	Front – Back

